

PowerTech® **6068D** Diesel Engine Specifications

PERFORMANCE DATA

Rated Power

Intermittent (I) 125 hp (93 kW) @ 2500 rpm
Continuous (C) 113 hp (84 kW) @ 2500 rpm

Peak Torque


Intermittent (I) 330 lb-ft (448 Nm) @ 1200 rpm

Fuel Economy


BSFC 0.387 lb/hp-hr (236 g/kWh) @ 2500 rpm

RATED BHP is the power rating for variable speed and load applications where full power is required intermittently.
CONTINUOUS BHP is the power rating for applications operating under a constant load and speed for long periods of time.
POWER OUTPUT is within + or - 5% at standard SAE J 1995 and ISO 3046.

EMISSION CERTIFICATIONS: CARB; EPA; and EU.

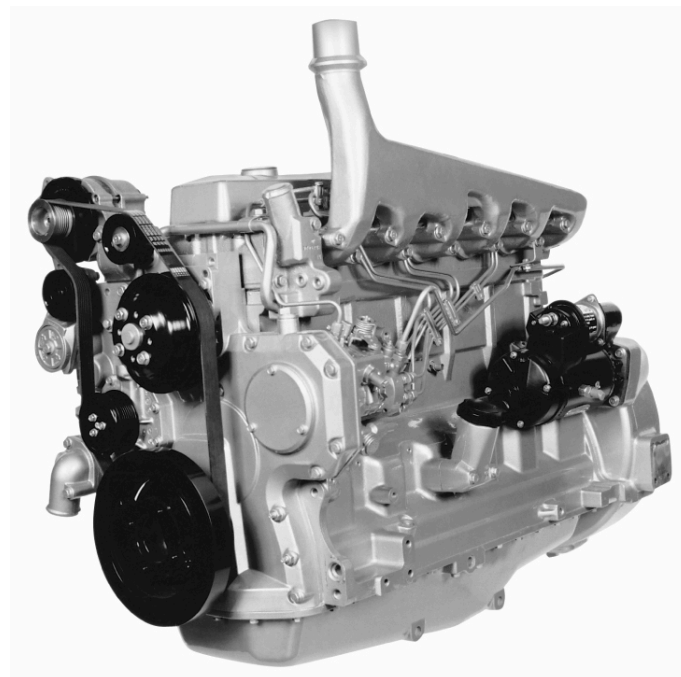

PERFORMANCE CURVE

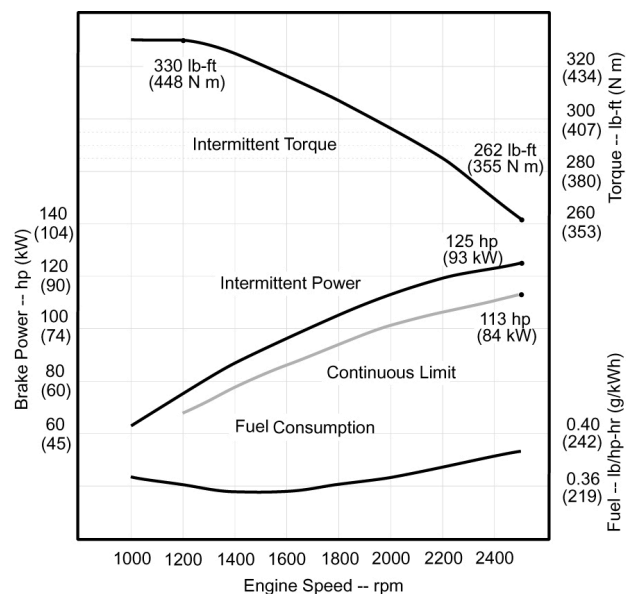


Photographs may show non-standard equipment.

PowerTech®
6068D Diesel Engine
Specifications

GENERAL DATA

Model	6068DF150	Aspiration	Natural
Number of Cylinders	6	Length - in. (mm)	43.9 (1116)
Displacement - L (cu.in)	6.8 (414)	Width - in. (mm)	24.5 (623)
Bore and Stroke - in. (mm)	4.19 x 5.00 (106 x 127)	Height - in. (mm)	40.4 (1025)
Compression Ratio	17.6:1	Weight (Dry) - lb. (kg)	1149 (522)
Engine Type	In-line, 4-cycle		

DIMENSIONS

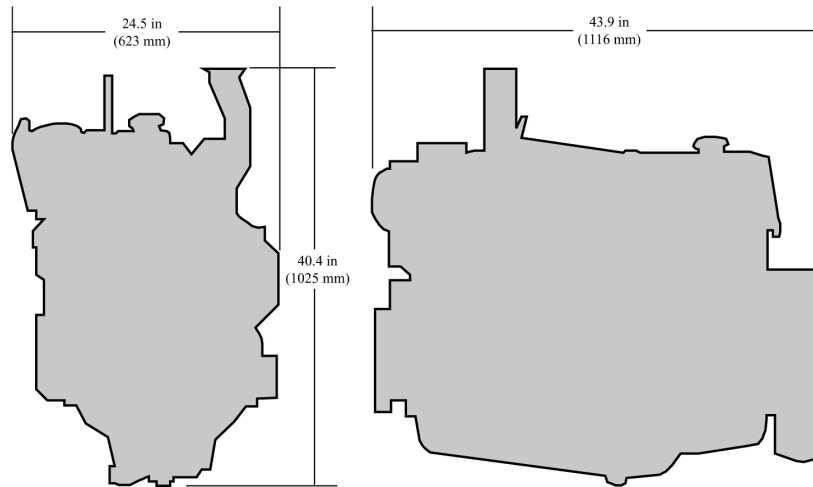

FEATURES AND BENEFITS

Meets EPA, CARB, and EU off-road emission regulation

- This engine has been developed to meet the off-road emission requirements without degradation in performance or power level.

Forged-steel, dynamically balanced crankshaft

- Constructed of heat-treated high-carbon steel for maximum strength.
- Journal surfaces induction-hardened for significantly increased wear life.

Forged-steel connecting rods

- 45-degree connecting-rod/cap-joint design allows the use of larger crankshaft-connecting-rod bearings for increased durability.

Adjustable poly-vee fan drive

- Ability to adjust the fan to 15 different positions provides superior application flexibility. The poly-vee fan drive also provides multiple fan ratios that can be matched to specific application requirements.

Replaceable wet-type cylinder liners

- Provides excellent heat dissipation.
- Precision machined for long life.

Either-side service

- Service points and filters are available on either side of the engine, which greatly simplifies engine installation.

Standard gear auxiliary drive

- A gear driven auxiliary drive is available as standard equipment and provides up to 50 hp (37 kW)

Strong cylinder block

- The weight of the cylinder block has been reduced, while maintaining overall strength.
- Crankshaft supported by seven main bearings.

World-class performance

- Higher torque rise, excellent fuel economy, and low oil consumption result in superior engine performance.

Specifications and design subject to change without notice.



John Deere Power Systems
3801 W. Ridgeway Ave.
PO Box 5100
Waterloo, IA 50704-5100
Phone (800) 533-6446
Fax (319) 292-5075

John Deere Power Systems
John Deere Engine Division
Usine de Saran, B.P. 13
45401 Fleury les Aubrais, France
Phone (33) 2 38 82 61 19
Fax (33) 2 38 82 60 00